

NEMI COLLECTION

Shower Mixer

206 2250 3 VD

Concealed installation | Single-lever mixer

PRODUCT PROFILE

Fitting type **Concealed single-lever shower mixer**

Installation **Wall-mounted, concealed**

Design **Square faceplate**

Operation **Single-lever mixer**

Cartridge **Ø35 mm ceramic cartridge**

Construction **DZR brass**

Required concealed unit **011 2250 3 VD**



28 L/min

FLOW AT 3 BAR

Single lever

MIXER TYPE

Square

FACEPLATE

011 2250 3 VD

CONCEALED UNIT

AVAILABLE FINISHES



Chrome



PVD Brushed
Nickel



Matt Black



PVD Brushed
Copper




PVD Brushed
Light Gold


NEMI | 206 2250 3 VD

Technical specification

SHOWER MIXER DIMENSIONAL DRAWING | ALL DIMENSIONS IN MM

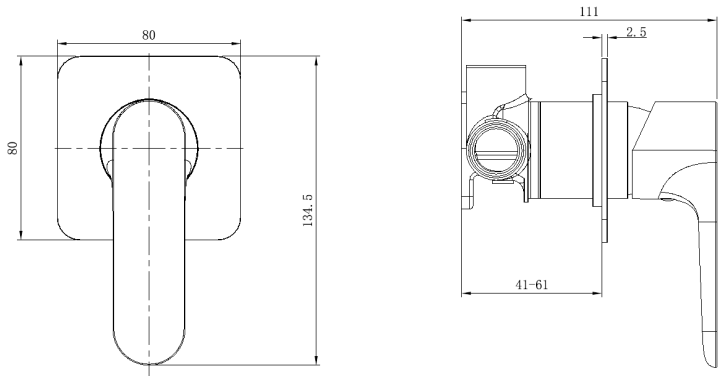

NOMINAL FLOW PERFORMANCE

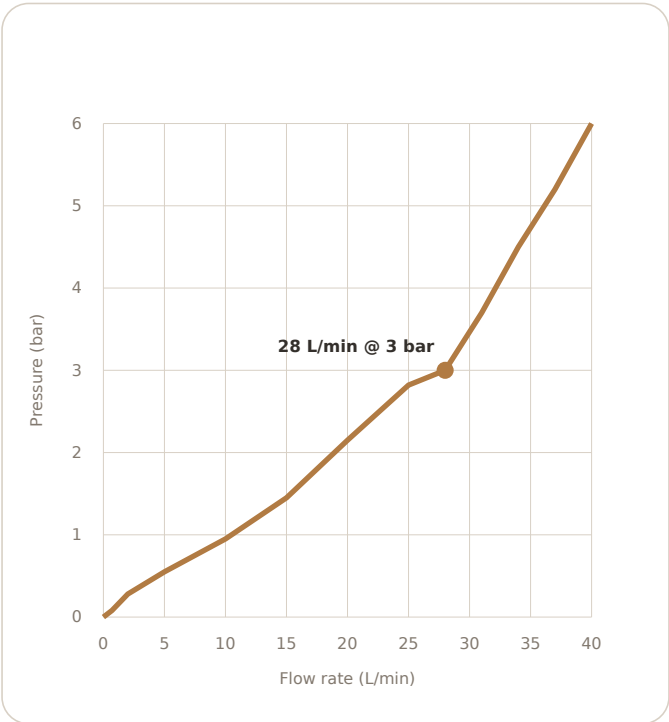

COMPONENTS & CONNECTIONS

Fitting type	Concealed single-lever mixer
Design	Square faceplate
Cartridge	Ø35 mm ceramic
Flow rate	28 L/min at 3 bar
Concealed unit	011 2250 3 VD
Faceplate	80 x 80 x 2.5 mm
Body connections	G1/2
Construction	DZR brass


Published flow rate: 28 L/min at 3 bar. The plotted curve is illustrative; actual performance depends on supply conditions.
Drawing dimensions are shown in millimetres and are subject to normal manufacturing tolerances.

NEMI | 206 2250 3 VD

Bill of materials

Finish set | concealed valve ordered separately as 011 2250 3 VD

EXPLODED FINISH-SET ASSEMBLY

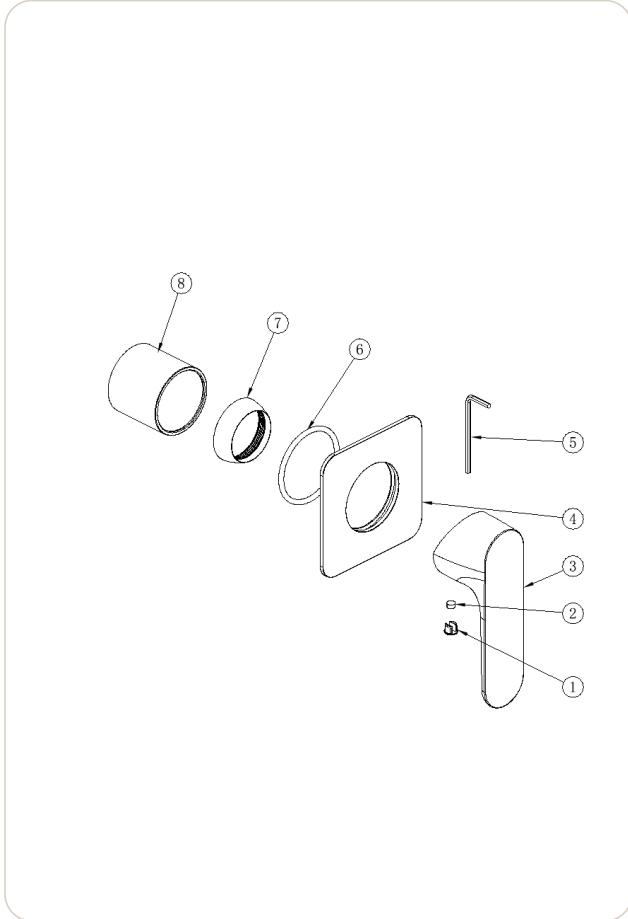

COMPONENTS

No.	Part code	Component / specification	Material	Qty
1	202030410726	Ø7.8 x 6.3 concealed plug	ABS	1
2	205011481601	M5 x 4 set screw	SS304	1
3	202014540226	Zinc-alloy handle	Zinc	1
4	206028321626	80 x 80 x 2.5 mm faceplate	SS201	1
5	202060041601	2.5 mm hex key	45# steel	1
6	207030700601	Faceplate seal / O-ring	NBR	1
7	205050760726	M34 x 1.25 decorative cartridge cap	ABS	1
8	206093370126	D42 x 38.2 decorative cartridge cap	H59	1

ASSEMBLY & FINISH NOTES

1. The trim set includes an 80 x 80 mm square faceplate and a single-lever handle.
2. The 011 2250 3 VD concealed valve is required and supplied separately.
3. Protect finished surfaces during installation; operate the handle through its full range before handover.
4. Item callouts 1-8 correspond to the supplied finish-set BOM drawing and component schedule.


NEMI | 206 2250 3 VD

REQUIRED CONCEALED UNIT | 011 2250 3 VD

Concealed valve assembly

Valve body BOM | for the 206 2250 3 VD Nemi finish set

EXPLODED CONCEALED VALVE ASSEMBLY

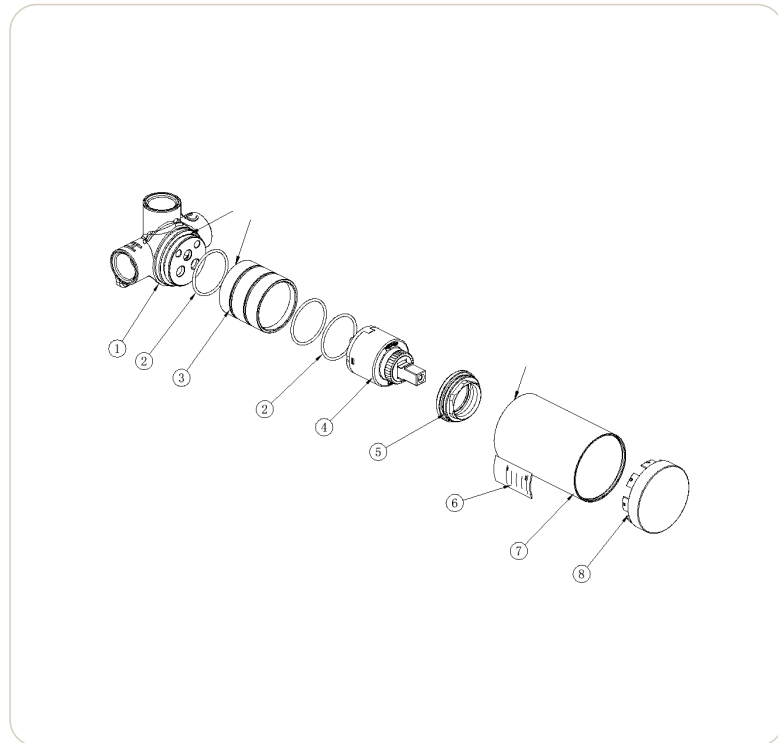

VALVE COMPONENTS

No.	Part code	Component / specification	Material	Qty
1	201510070102-DR	Concealed valve body	DR brass	1
2	208002550601	O-ring D30.6 x D1.78 mm	NBR	3
3	206094671602	Valve sleeve Ø40 x 37.2 mm	SS304	1
4	204011669901	Ø35 ceramic cartridge	Assembly	1
5	205020030102	M37 x 1.5 x 12.5 hex nut	H59	1
6	3110010	Depth ID label	Paper	2
7	207044110701	Cartridge cover	ABS	1
8	205076990701	Protective plug	ABS	1

INSTALLATION & QUALITY NOTES

1. Align the valve depth mark with the finished-wall reference; the drawing indicates 41-61 mm installation depth.
2. Flush supply lines and valve passages before commissioning. Pressure-test the valve before closing the wall.
3. Item callouts 1-8 correspond to the supplied concealed-valve drawing and schedule. Source drawing notes translated for identification.